

➤ MAIN PROFILE EXTRUSION LINES AVAILABLE

1. WOOD PLASTIC COMPOSITE
2. PVC FOAM PROFILES
3. PVC WINDOW / DOOR COMPLETE PLANT
4. PVC RIGID / FLEXIBLE PROFILES
5. PVC TRUNKING COMPLETE PLANT
6. PS FOAM PICTURE FRAME AND BUILDING / DECORATION PROFILE
7. ALL KINDS OF PROFILE DIE

➤ MAIN PIPE EXTRUSION LINES AVAILABLE

1. HDPE / LDPE PIPE RANGE TO MAX. DIA. 1200mm
2. PVC PIPE RANGE TO MAX. DIA. 630mm
3. LDPE COSMETIC TUBE
4. PU PRECISION TUBE
5. HDPE STEEL PIPE COATING SYSTEM
6. PC TRANSPARENT TUBE
7. FLEXIBLE PVC TUBE AND REINFORCED HOSE
8. RIGID / SOFT PVC SUCTION HOSE
9. PVC MEDICAL TUBE
10. PVC DIE UPTO DIA. 630mm
11. PE DIE UPTO DIA. 1200mm

➤ MAIN COMPOUNDING LINES AVAILABLE


1. PVC COMPOUNDING
2. PE COMPOUNDING
3. WPC COMPOUNDING
4. ABS COMPOUNDING
5. EVA COMPOUNDING
6. CPVC COMPOUNDING

➤ PLASTIC NET AVAILABLE

1. STRETCHED / SQUARE NET
2. KITCHEN FILTER NET
3. MULTI-FUNCTION ARGYLE NET
4. NET PIPE
5. FRUIT NET
6. NET BAG BOTTOM SEALING

➤ ACCESSORIES

1. MIXER AND COOLER
2. PRINTING MACHINE

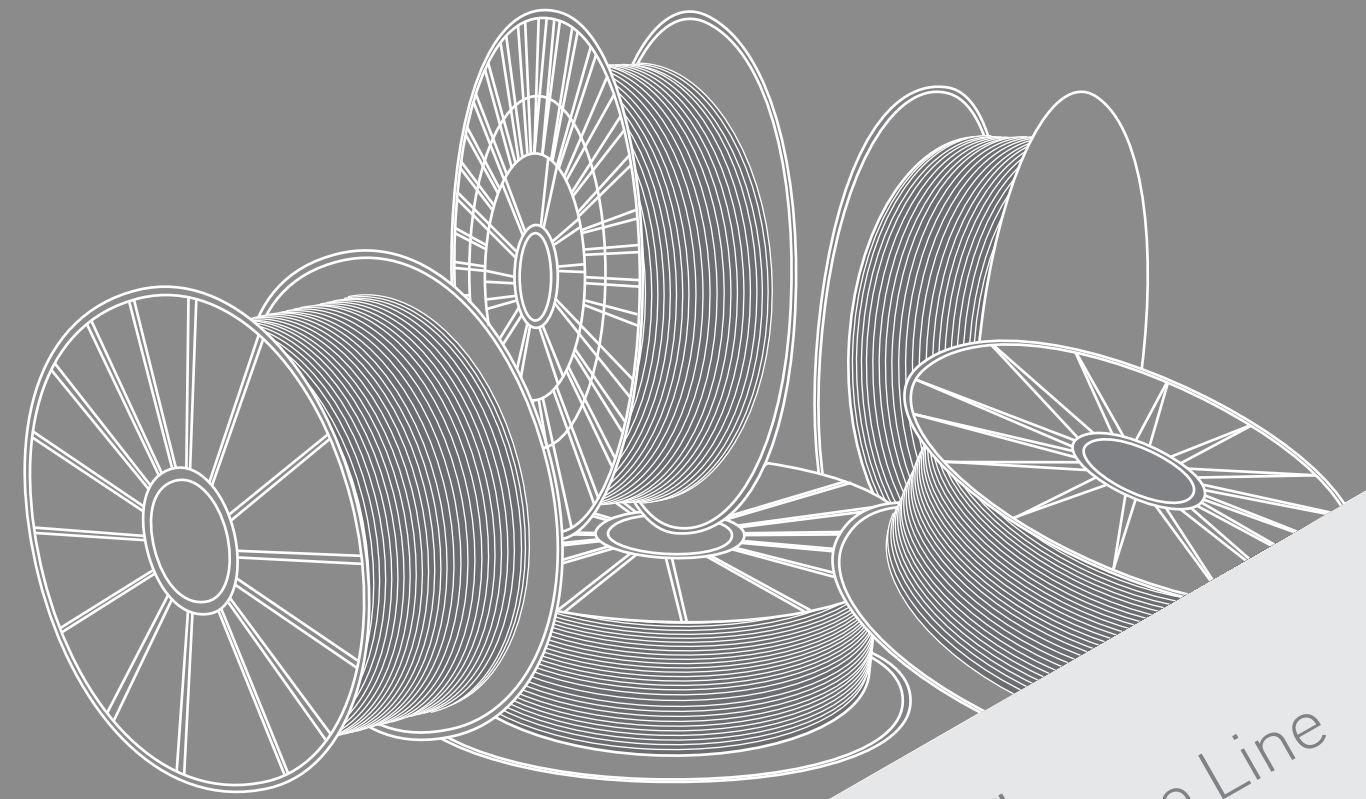

3D Printing
Filament Machine Line
We offer turnkey and total solution



Everplast Machinery Co.,Ltd

Office. 11F., No.106, Yongle St., Luzhou Dist., New Taipei City 247, Taiwan
TEL.+886-2-2289-7271 FAX.+886-2-2289-7282
Factory. No.151, Yonke S. Rd., Yonkang Dist., Tainan City 710, Taiwan
TEL.+886-6-201-4846 FAX.+886-6-201-4290
E-mail. everstar@mail.everplast.net
www.everplast.com.tw



Everplast



uCloud



Designed by Polaris 2016-06 +886-4-24517070



3D Printing Filament Machine Line



Product Feature

- A. Precision: outer diameter accuracy:
1.75 $\pm$ 0.05mm and 3.00 $\pm$ 0.05mm
- B. Package: finish product is coiled very neat and easily
- C. Production:
Ordinary type: line speed could be 30-50 M/min
High speed type: line speed could be 50-100 M/min
- D. Product: there is no hole inside of the finish product and feed the material for 3D printing m/c smoothly

Main Machine Specification

- A. EMS-3528 Extruder
Output: 2-8 kg/hr (depend on product size and resin)
Motor: 7.5 HP AC servo + inverter
- B. EWT-6000-3H Cooling Tank
Tank body by stainless steel SUS#304, length: 6000 mm
Special design cooling system for ABS and PLA
- C. ETB-030560 Belt Haul-off Unit
Belt type
Effective track length: 250 mm
Effective track height: 110 mm
- D. EWD-200D
Effective track width: 50 mm
Haul-off line speed: max 60 M/min, min 3 M/min
Motor: 1HP AC + inverter
- E. EWB-200D
Bobbin ID: 38 m/m, OD: 200 m/m,
Width: 100 m/m (adjustable)
Motor: 1HP AC motor
- F. Air Cutter
Cutting dia.: max. dia. 20 m/m or 50(w) x 2 m/m(t)
Cutting speed: 60 pcs/min

